

BRIGHT WISE CENTER BASKE

LED TROFFER LIGHT

Power Factor: ≥0.9 for stable performance

Driver includes dimming control wiring for 0-10V systems.


The Dim-to-off voltage threshold of optional 12V

SPECIFICATIONS


AUX integrated driver ranges from 0.1V to 0.5V

Product #	Size	Wattage	Efficiency	Lumens	CCT	Price
Flicker-free 0-10V dimming capability, down to 10%	1.5 ft	135/115/100W	150 lm/W	20500/17500/15000 lm	5000K	
Total Harmonic Distortion: <20%	1.5 ft	135/115/100W	150 lm/W	20500/17500/15000 lm	5000K	

2 FT




4 FT

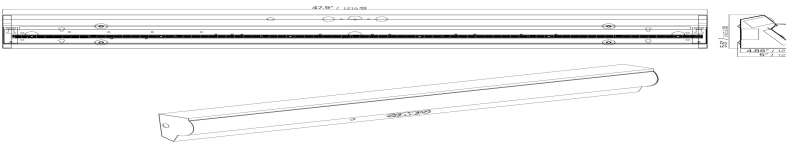

ACCESSORIES

Suspension Kits

Product #	Description	Price



Surface Mount Kits

Product #	Description	Price

Wire Guards

Product #	Description	Price

Emergency Power Backup

Product #	Description	Price

ADD-ONS

Sensor

Product #	
Description	
Voltage	
Wattage	
DLC	
Price	

Backup Battery

Product #	
Description	
Voltage	
Wattage	
DLC	
Price	

